

Riparian Restoration on California's Coast

November 3, 2005


Carmel River Restoration Planting



MPWMD employees plant native vegetation along the Carmel River to provide river bank stabilization and habitat. Between 1983 and 2001, more than seven miles of streambanks were revegetated.

7

Streamflow Monitoring



- 18 continuous recording stations
- USGS standards
- Remote access to real time streamflow data

Flow measurement using a bridge crane.

Measuring flow with wading rod and current meter.

Benefits:

- Water supply planning
- Hydrologic modeling
- Early flood warning
- Monitoring water use

8

Gravel Injection Program

Mitigation for Habitat Loss

- Injection program replaces gravel retained by main stem reservoirs
- 4,000 tons of material placed since 1993



Placing spawning gravel through the bridge at the Los Padres Dam spillway.

A backhoe pushes spawning gravel into pool near fish ladder.

9

Factors in Steelhead Decline

- Inadequate passage facilities at Los Padres Dam
- Dry season diversions at San Clemente Dam
- Pumping of streamflow and groundwater
- Loss of surface storage capacity in main stem reservoirs
- Reduction in the extent and diversity of streamside vegetation


10

Factors in Steelhead Decline (continued)

- Reduced amounts of large wood
- Sediment retention in main stem reservoirs
- Sedimentation of habitat from chronic and episodic bank erosion
- Blockage of smolt emigration
- Sedimentation in the Carmel River Lagoon

11

Los Padres Dam Passage







MAR 18 2004

12




Riparian Restoration on California's Coast

November 3, 2005

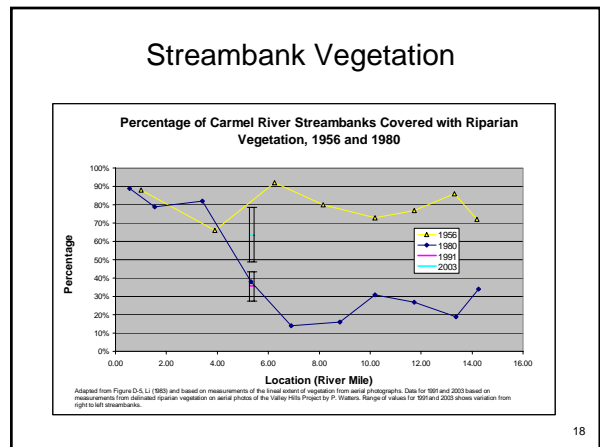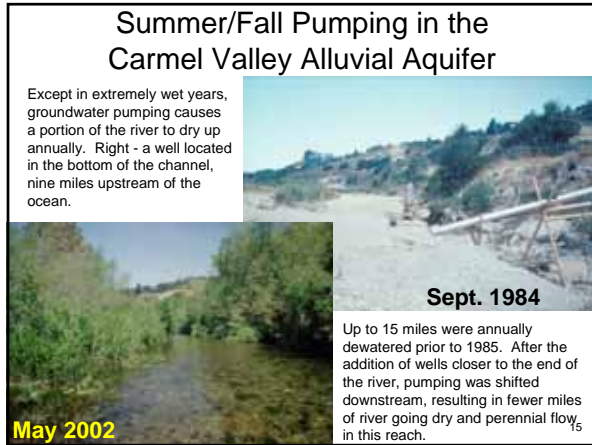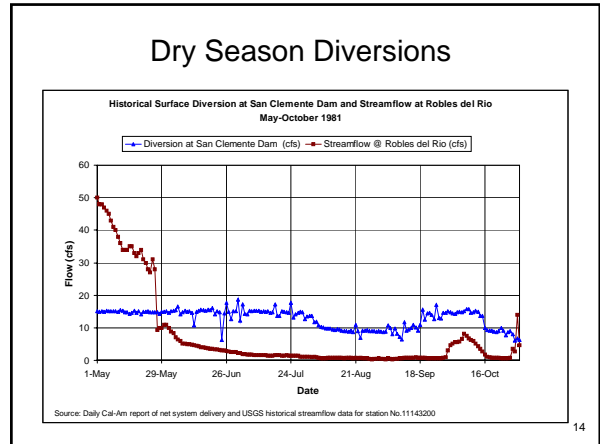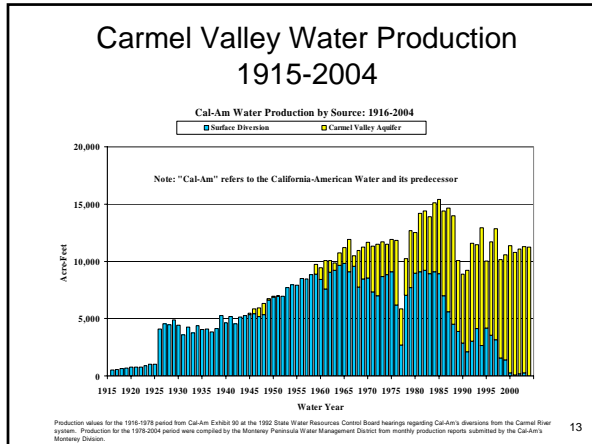

Riparian Restoration on California's Coast

November 3, 2005

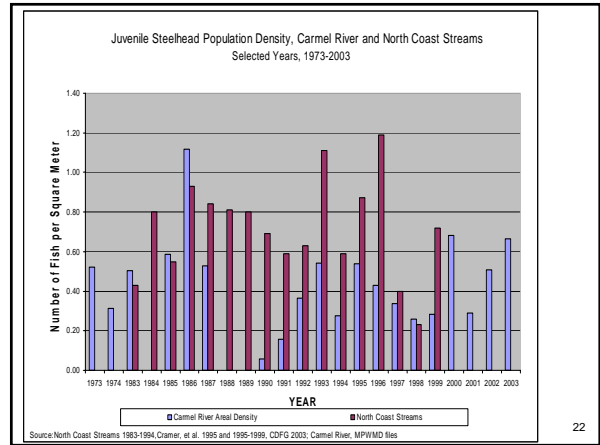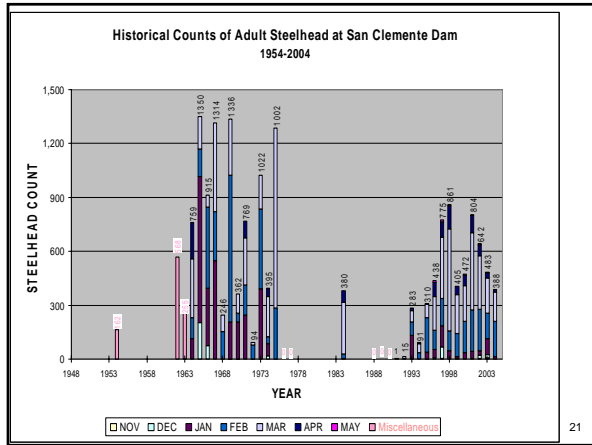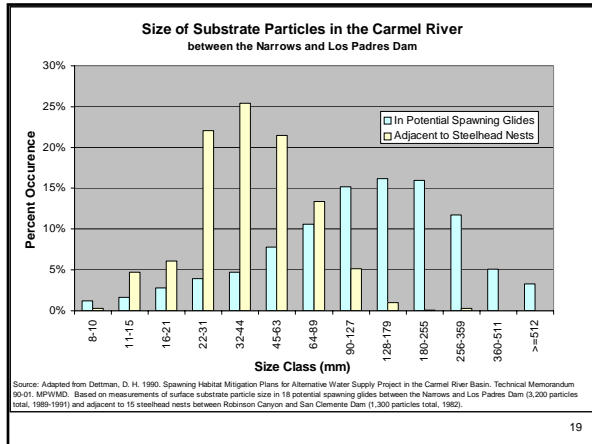

Monterey Peninsula Water Management District

Installation of Large Wood Habitat Structures at the deDampierre Restoration Project

- Work benefits sensitive aquatic species found in the Carmel River such as steelhead (*Oncorhynchus mykiss*), California red-legged frogs (*Rana aurora draytonii*), and Western pond turtles (*Clemmys marmorata*).

Large Wood Project Location

The project area is centered at approximately River Mile 13.5 (measured from the Pacific Ocean), across from the deDampierre Little League fields near Carmel Valley Village.


The Carmel River is located about 100 miles south of San Francisco in a Mediterranean climate. It hosts the largest remaining steelhead run on the West Coast south of San Francisco. The river begins in the Ventana Wilderness at nearly 5,000 feet, flows for 20 miles through narrow canyons, then crosses a wide (up to 1/2-mile) alluvial valley for the last 16 miles before emptying into the Pacific Ocean. Drainage area at the mouth is 255 square miles. Winter flows can peak at over 16,000 cfs. In summer, the lower eight miles often go dry.

Riparian Restoration on California's Coast

November 3, 2005

Reworking floodplain deposits

February 1995



25

PROJECT SITE - MAY 2002




This reach of the river underwent significant bank erosion during 1995 and 1998 after winter peak flows of 16,000 cubic feet per second (cfs) and 14,500 cfs, respectively. The stream migrated laterally up to 200 feet during this period, resulting in the loss of streamside vegetation and several acres of adjacent mature riparian forest and oak-covered landslide and terrace deposits. The 700-foot long pool that remained was homogenous, covered with large cobbles, and nearly devoid of streamside cover.

26


LOG DONATION

These redwood and Douglas fir logs were removed by the Big Creek lumber company from the University of California at Santa Cruz to make way for the Physical Sciences Building. Big Creek, located in Davenport, stored the logs for two years after Marty Gingras (pictured on top of the fir logs) and Jennifer Nelson, biologists with the California Department of Fish and Game, negotiated with Big Creek and UCSC to use the logs in habitat restoration along the Central Coast of California. In addition to donating the logs, which were valued at \$10,000, Big Creek Lumber Company donated labor to take the logs to the Carmel River.


27

California red-legged frog Surveys



MPWMD found evidence of California red-legged frogs (CRLF) at the site in late spring 2002. Because habitat in the project area could support CRLF, a condition of the biological opinion issued by US Fish and Wildlife Service for this project required a minimum of two daytime and nighttime surveys. Prior to the start of construction in October, Dawn Reis lead a team of biologists who conducted four night-time surveys during which ten adult CRLF and two juveniles were found and relocated. Inspections were also conducted prior to each day's activities.

28


Steelhead Relocation



Using state of the art electro fishing equipment, MPWMD staff (shown at left) made four passes through the site prior to the beginning of construction. A total of 160 steelhead were captured and relocated.

29

TEMPORARY ROCK DIVERSION DAMS



The low rock dam in the foreground, made of clean cobble and boulders found on site, prevents fish from entering a diversion channel (between the two dams), but allows algae and moss to pass through. A second dam, made from finer material found on site, diverts most of the flow from the main stem into the diversion channel. Flows ranged from about 5 to 8 cubic feet per second (cfs) during construction. Six fish were relocated out of the diversion at the end of the project.

30

Riparian Restoration on California's Coast

November 3, 2005


DIVERSION CHANNEL

Flow diversion reduced the volume of water in the work site (out of the picture to the left) and prevented sediment-laden water from moving downstream, except during initial diversion and backfill operations. A small crossing for vehicle access to the worksite can be seen just above the 24-inch culvert. Willow cuttings lining the left side of the diversion trench were laid immediately prior to backfilling. Placing cuttings down to groundwater level during low flows eliminates the need for irrigation during summer months. This reach of the river maintains perennial flow.



24-inch culvert

AFTER DIVERSION



Before construction of a diversion, flow covered the cobbles up to the grass seen to the left of Thomas Christensen (examining the underside of one of the cobbles). Main stem surface flow ceased completely 2,000 feet downstream (flow went subsurface), which reduced concerns about sediment impacts from construction. By diverting flow, the contractor was able to pump subsurface water out of construction areas.

32

SITE CONDITIONS – OCTOBER 2002



**BIG LOGS
LIMITED
ROOM
HIGH WATER
TABLE
UNEVEN
BOTTOM**

Work started in early October 2002, during the lowest flow period. An estimated 1/4 cfs infiltrated through the coarse alluvium. Work space in the channel bottom varied from about 6 to 10 feet wide. The Contractor (Carmel Valley Construction) estimated that the logs weighed up to eight tons. Large cobbles and small boulders made travel in the channel bottom a bumpy adventure for the excavator.

PREPARING BOULDERS



Will Drew uses an impact drill to make 7/8-inch holes, which were thoroughly cleaned with brush and water and air dried before anchor placement. Bolts were chosen over gluing cable directly into the boulders to fasten logs, as failure of the attachment system could not be tolerated. Hilti HY-150 adhesive was rated at 20,000 pound breaking strength for this application, which required custom work to extend the threaded portion of the anchor bolts (lower left, visible as dark portion of bolt). Bolts, four per boulder, were spaced two feet apart (below). Curing time for the glue ranged from about two to four hours.




34


HAULING BOULDERS



One of the contract requirements was to pick each boulder up to test the strength of rock anchor bolts. Carrying boulders in the fashion shown at left bent the steel hooks used to lift the boulders as the loader bounced over large cobbles in the stream bottom. The contractor opted to haul boulders in the loader bucket and lift each boulder into place with an excavator, using the four hoisting chains shown at left.

35

PLACING BOULDERS



Four to six-ton boulders were individually surveyed into place to provide a line of support and to anchor the logs. Here, the excavator is moving a boulder by hooking on to one of the four 3/4-inch cable anchors inserted in each rock.

36

Riparian Restoration on California's Coast

November 3, 2005

SETTING FOOTER LOG

A footer log was installed to encourage scour along the toe of the streambank. Although not visible in this photo, the footer log is anchored with four large boulders similar to the ones shown in the previous photo. Willow cuttings placed behind the footer log will be protected from scour during high flows.



Setting an eight-ton log and rootball in the right place requires experience and patience. Here, Gerry Paddock, the owner of Carmel Valley Construction, deftly places a 38-foot long log and rootball on top of four boulders. The log was placed at a 30 degree horizontal angle to flow. The log was also angled vertically to place 1/2 of the rootball below the existing riverbed and the end of the log several feet up the bank. This orientation encourages bottom scour at the rootball and in the middle of the channel during frequent flows (1 to 3-year return), which range from about 1,000 cfs to 3,000 cfs at this location.

ROOTBALL PLACEMENT



NUDGING the ROOTBALL into PLACE



The pump at the left is pumping about 250 gallons per minute or about 0.5 cfs. Channel bottom material was so coarse that water pumped out here infiltrated the alluvium approximately 300 feet downstream, before flowing back into the main stem.

39

DRILLING HOLES FOR CABLING



Will Drew augurs through a redwood log. Cable is passed through the hole, around the log, through cable anchors glued into the boulder and clamped. Redundancy in the anchoring system (two cables per boulder) was a precaution made necessary by the potential cost of failure – one log loose in the river could cause a bridge washout or severe bank erosion.

40

LOG CABLED IN PLACE

As indicated by the green point on the end of this log, the diameter is 2.25 feet. The largest diameter log was nearly 3.25 feet at the equivalent of breast height (the logs never were vertical during the project). Logs were anchored to boulders using eight 3/4-inch stainless steel cables (two per boulder). Willow cuttings at the lower right were placed behind the log prior to backfilling.



41

TIGHTENING CABLE CLAMPS



Will Drew checks the four 3/4-inch cable clamps placed on each cable. Torque was specified at 130 foot-pounds. Proper cabling was critical to the success of this project.

42

Riparian Restoration on California's Coast

November 3, 2005

PLANTING NATIVE SEEDLINGS



Here, MPWMD river workers Matt Lyons and Mark Bekker plant gooseberry, sycamore, buckeye, and alder seedlings in areas disturbed by grading. Rains just one week after installation and close proximity to water mean that these plants, if they can survive winter flows in the first few years, are unlikely to need supplemental irrigation during the dry season.

43

PLANTING CUTTINGS IN THE FLOODPLAIN

Digging a hole for a three-inch diameter willow or cottonwood cutting with a four-yard excavator bucket may seem like overkill, but the power of an excavator is needed to dig up the large cobble and boulders in the floodplain adjacent to the logs. The largest particle dug up during this project was in the one-ton range. Even a large backhoe with a three-foot wide bucket is not as effective as this excavator. Note the depth of the hole (about five feet), which allows the cuttings access to water year-round.



44

October 31, 2002
(right)

Work was completed one day before expiration of the permits on November 1, 2002. One week later, 10 inches of rain fell in the upper watershed, causing the river to flow at 400 cfs through this site.



August 18, 2005
(left)

45

WINTER SCOURING ACTION



Here, flow of 500 cfs is moving from left to right and scouring the channel bottom near the rootball (upper center of photo) and under the log. A hydraulic jump can be seen on the downstream side of the log. At higher flows, the jump is drowned out and becomes a standing wave. Controlled energy dissipation is important in this reach, where chronic bank erosion threatens structures downstream, close to the banks.

MPWMD plans to resurvey the channel bottom during the summer of 2003 to document scouring effects.

46

Looking
Downstream
August 2005



Above - bedload material passes under digger log.

Right - bedload material deposits between bank and digger log.



47

PROJECT COSTS (2002)

	<u>BUDGET</u>	<u>ACTUAL</u>
Construction*	\$ 62,550	\$ 46,287
Environmental Consultant*	4,000	4,555
Biological sampling*	2,294	2,294
Total reimburseable costs*	\$ 68,844	\$ 53,136
MPWMD in-kind Services	6,404	6,404
TOTAL COSTS	\$ 75,244	\$ 59,540

*These costs reimbursed by grant funding from the California Department of Fish and Game

48

Riparian Restoration on California's Coast

November 3, 2005

Monitoring of log structures

- annual steelhead population surveys
- benthic macroinvertebrate surveys
- winter peak flow magnitude
- periodic topographic surveys
- photo documentation
- check cable/anchor connections

49

Field trip goals

- Observe channel geometry and substrate conditions in project vicinity
- Review construction methods and constraints
- Observe scour and deposition patterns
- Observe planted and naturally recruited riparian species

- Note: hip waders or shorts and water shoes recommended

50

CATCH AND RELEASE PROGRAM



Photo courtesy of the Carmel River Steelhead Association

Fishermen are eager to restore the steelhead fishery. Organizations such as the Carmel River Steelhead Association routinely volunteer their time for summer rescues, monitoring, and habitat enhancement. Cal Trout, the California Sportfishing Protection Alliance, and the Sierra Club are also actively involved with advocating for the protection and enhancement of the steelhead fishery. LEFT: Nick Larson, an avid young fisherman holds up a 26-inch steelhead caught in Garland Park in the spring of 2001 under CDRC's catch and release program.

51